


Mounting Gasket

BC Series • High-Performance Crimp Connectors

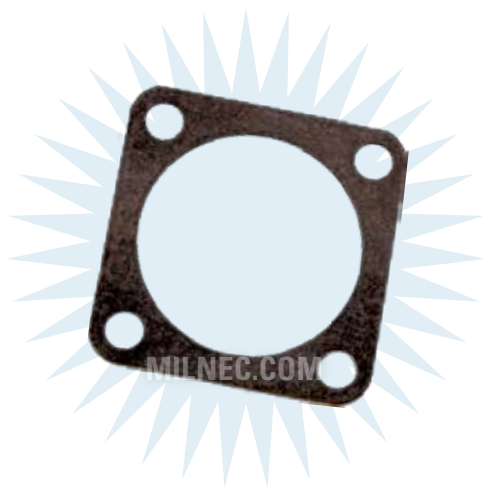

BCGE - 14

1 2

1 BASIC PART NUMBER

- BCGE** Neoprene environmental (weather resistant)
Temp. range -40°F to +230°F (-40°C to +110°C)
- BCGL** Fluorosilicone (jet fuel & oil resistant)
Temp. range -70°F to +392°F (-56°C to +200°C)
- BCGD** Conductive EMI-RFI fluorosilicone, Al-Ag filled
Temp. range -70°F to +392°F (-56°C to +200°C)
Shielding effectiveness at 90 dB @ 10GHz

2 SHELL SIZE

See Gasket Dimensions table below

Note: See part builder (p. D-13) for additional kit options.


Environmentally seal your mounting point

Mounting gaskets will seal the mounting space between the receptacles and the panel to maintain the environmental integrity of your enclosure. They may be used in either rear or front mount receptacle installations.

Gasket Dimensions

Shell Size	W	S	Z	H	F
8	.812 (20.6)	.594 (15.1)	.130 (3.3)	.500 (12.7)	.024 (.6)
10	.938 (23.8)	.719 (18.3)	.130 (3.3)	.625 (15.9)	.024 (.6)
12	1.031 (26.2)	.813 (20.7)	.130 (3.3)	.750 (19.1)	.024 (.6)
14	1.125 (28.6)	.906 (23.0)	.130 (3.3)	.875 (22.2)	.024 (.6)
16	1.219 (31.0)	.969 (24.6)	.130 (3.3)	1.000 (25.4)	.024 (.6)
18	1.312 (33.3)	1.063 (27.0)	.130 (3.3)	1.125 (28.6)	.024 (.6)
20	1.438 (36.5)	1.156 (29.4)	.130 (3.3)	1.250 (31.8)	.024 (.6)
22	1.563 (39.7)	1.250 (31.8)	.130 (3.3)	1.375 (34.9)	.024 (.6)
24	1.688 (42.9)	1.375 (34.9)	.130 (3.3)	1.500 (38.1)	.024 (.6)

Dimensions are in inches (mm).

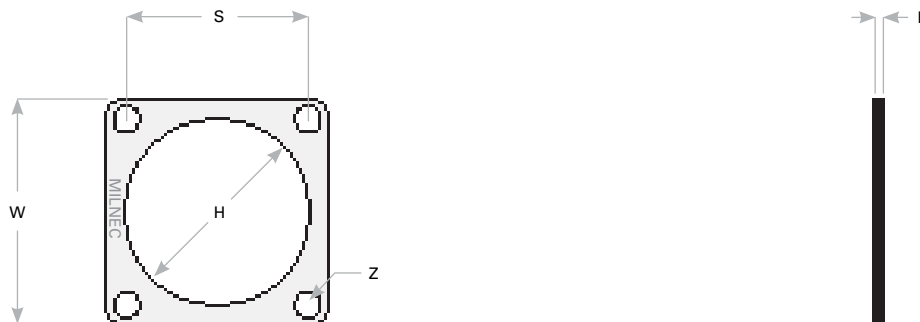

Rev. 1806